



## ROV Hooks

ROV Hooks are specifically designed for ROV use, to release or move heavy equipment in the deep ocean, or to retrieve equipment back to the surface from the deep ocean. These ROV Hooks provide extremely reliable and trouble free operation. Their unique design maintains full integrity of the hook and incorporates many safety features that prevent any accidental release of the load during handling. The operation requires just a few simple steps through the use of a manipulator. ROV Hooks are painted bright yellow which makes them clearly visible in the ocean and helps in achieving the safety objectives of the subsea operations.

### Specifications

#### Working Load Limit (WLL)

- 7, 11, 15, 22, 30, 37, 45, 60 Tons

#### Features

- Designed for ROV operation
- Reliable


#### Applications

- Release of equipment in the ocean
- Retrieve equipment from ocean

#### Load Certification

- Available for twice the load ratings

### All dimensions are in inches

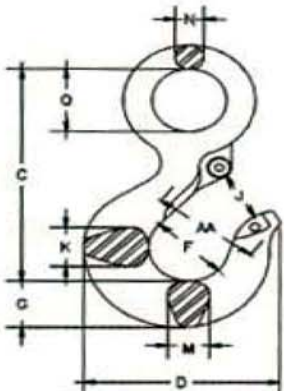

| Hook Tons | C     | D     | F    | G    | J    | K    | M    | N    | Q    | AA   | Weight (lbs) |
|-----------|-------|-------|------|------|------|------|------|------|------|------|--------------|
| 5         | 5.77  | 4.81  | 2.00 | 1.44 | 1.36 | 1.31 | 1.31 | 0.72 | 1.56 | 2.50 | 8.50         |
| 7         | 7.37  | 6.27  | 2.50 | 1.81 | 1.61 | 1.66 | 1.66 | 0.90 | 2.00 | 3.00 | 12.80        |
| 11        | 9.07  | 7.45  | 3.00 | 2.25 | 2.08 | 1.88 | 1.63 | 1.11 | 2.44 | 4.00 | 20.00        |
| 15        | 10.08 | 8.30  | 3.25 | 2.59 | 2.27 | 2.19 | 1.94 | 1.27 | 2.84 | 4.00 | 27.10        |
| 22        | 12.53 | 10.30 | 4.25 | 3.00 | 3.02 | 2.69 | 2.38 | 1.56 | 3.50 | 5.00 | 47.50        |
| 30        | 14.06 | 13.62 | 5.00 | 3.62 | 3.25 | 3.00 | 3.00 | 1.75 | 3.50 | 6.50 | 69.50        |
| 37        | 18.19 | 14.06 | 5.38 | 4.56 | 3.00 | 4.00 | 3.19 | 2.00 | 4.50 | 7.00 | 115.00       |
| 45        | 20.12 | 15.44 | 6.00 | 5.06 | 3.38 | 4.50 | 3.25 | 2.18 | 4.94 | 8.00 | 167.00       |
| 60        | 23.72 | 18.50 | 7.00 | 6.00 | 4.12 | 5.50 | 3.91 | 2.53 | 5.69 | 10.0 | 250.00       |